

**FEATURES**

- ITE 60950-1, 62368-1 approvals. ( Class I )
- 3-prong IEC320-C14, Class I (I/O Switch Option)
- Altitude during operation: ITE/Medical up to 5000m.
- ≤ 0.15W No Load Input Power
- Touch current less than 100uA
- 3 year warranty



**ELECTRICAL SPECIFICATIONS**

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : < 40A peak @115VAC; < 80A peak @230VAC cold start @25°C
- Input current (rms) : 2.5A @115VAC; 1.3A @230VAC max.
- Efficiency : > 89% (Average) 25 %, 50 %, 75 % and 100 % of full load @ 115/230VAC
- Touch current < 100uA @264VAC
- Maximum output power (Po) : 250 Watts convection cooling
- Hold-up time : > 10ms typical @full load, 115VAC
- Short circuit protection : Auto-recovery
- Over load protection : 105% to 160% maximum power, Auto-recovery
- Over voltage protection : Auto-recovery

**RoHS compliant**

Dimension : L 200xW 90xH45 mm ( 7.874"x3.543"x1.77" )  
Weight : 1.3 kgs. ( 2.87 lbs. )

**SAFETY STANDARDS**

- UL/cUL UL60950-1
- UL/c-UL UL62368-1
- TUV EN60950-1
- TUV EN62368-1
- CB IEC 60950-1
- CB IEC 62368-1

**EMC STANDARDS**

- EN55032 Class B
- EN55024 Class B
- FCC Part 15 Class B
- CE

**ENVIRONMENTAL**

- Operating temperature : -20 to +60°C (Refer to "Derating Curve")
- Cooling: Convection-cooling
- Storage temperature: -20°C to +85°C
- Humidity: Non-condensing 0% to 95%
- MTBF : > 200,000 hours @full load and 25°C ambient temperature based on Bellcore TR-332

**DC OUTPUT & FEATURES**

Model No.	Output Rating		Po	Output Regulation	Ripple & Noise (Vp-p)	DOE Efficiency	EU ErP
PW-250A-1Y120P1IZ	+12V	20.83A	250W	±5%	240mV	VI	Tier 2
PW-250A-1Y190P1IZ	+19V	13.157A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y240P1IZ	+24V	10.416A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y280P1IZ	+28V	8.928A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y360P1IZ	+36V	6.94A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y480P1IZ	+48V	5.208A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y540P1IZ	+54V	4.629A	250W	±5%	300mV	VI	Tier 2

**Note:**

1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 47uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.
2. AC INLET : IEC 320-C14(3PIN)
3. Z = S to denote With I/O Switch, Z = X to denote Without I/O Switch.



**POWER-WIN TECHNOLOGY CORP.**

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Road, Shi-Chi, New Taipei City, 22101 Taiwan, R.O.C.


Tel : 886-2-26983989(Rep) Fax : 886-2-26983978

http : //www.power-win.com


E-Mail : sales@power-win.com

**MECHANICAL SPECIFICATION**

Model No. : PW-250A-1YXXXP1IS  
With "S" With I/O Switch

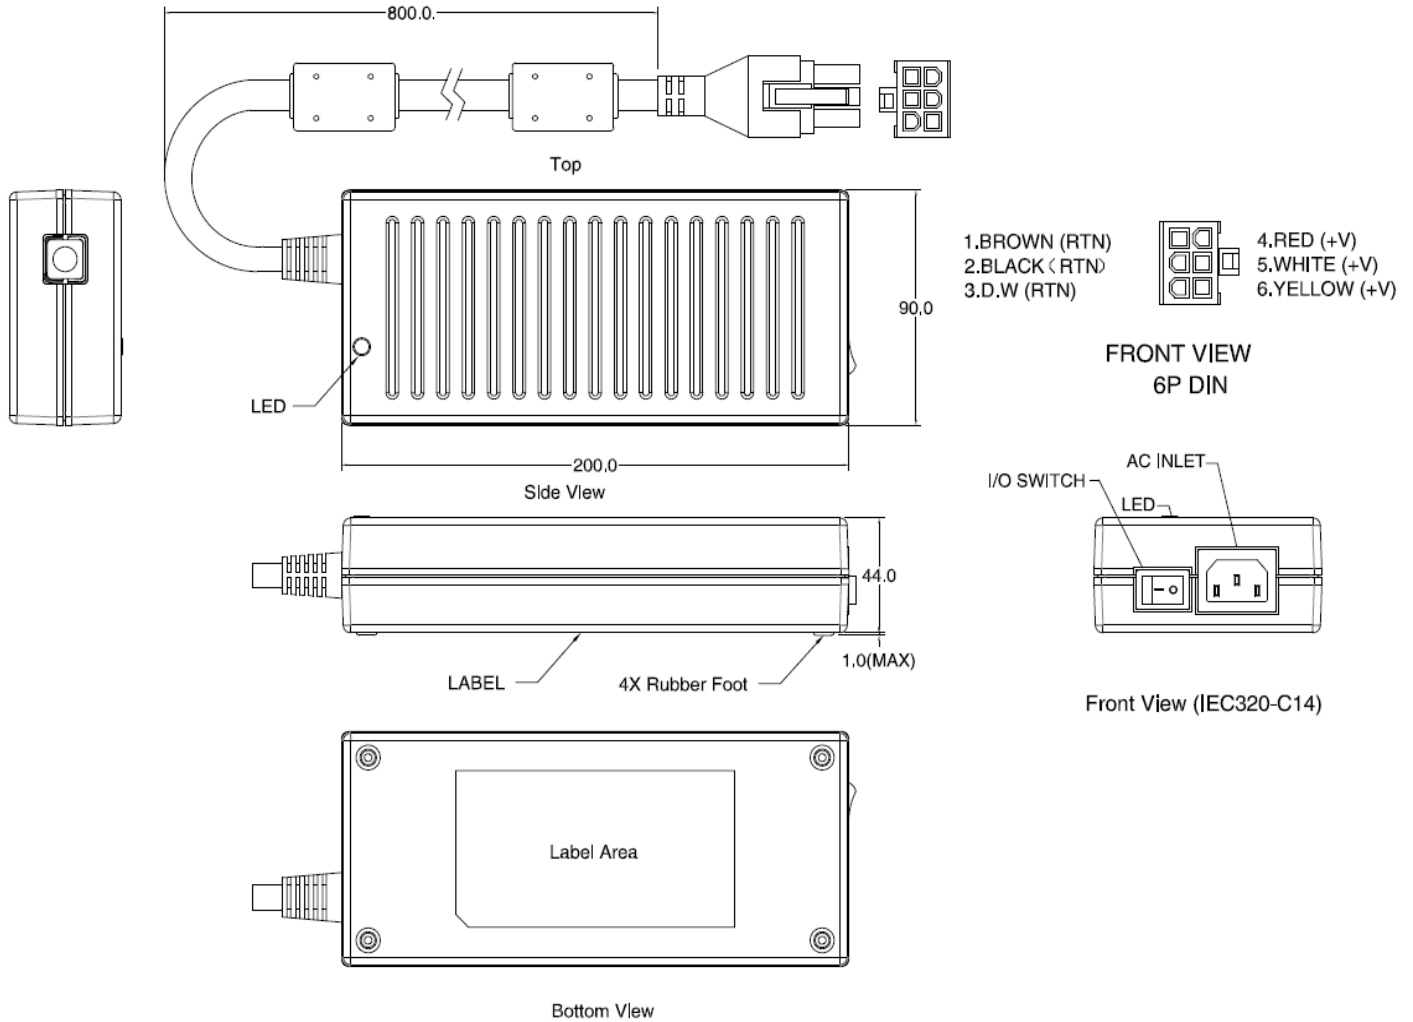

Dimension : L200(7.874") x W90(3.543") x H45(1.77")mm  
NOTE : TOLERANCE: +/-1mm(0.04")(LxWxH)



**POWER-WIN TECHNOLOGY CORP.**

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Road, Shi-Chi, New Taipei City, 22101 Taiwan, R.O.C.

Tel : 886-2-26983989(Rep) Fax : 886-2-26983978


http : //www.power-win.com

E-Mail : sales@power-win.com

REV. 1.1

**MECHANICAL SPECIFICATION**

Model No. : PW-250A-1YXXXP1IX  
With "X" Without I/O Switch

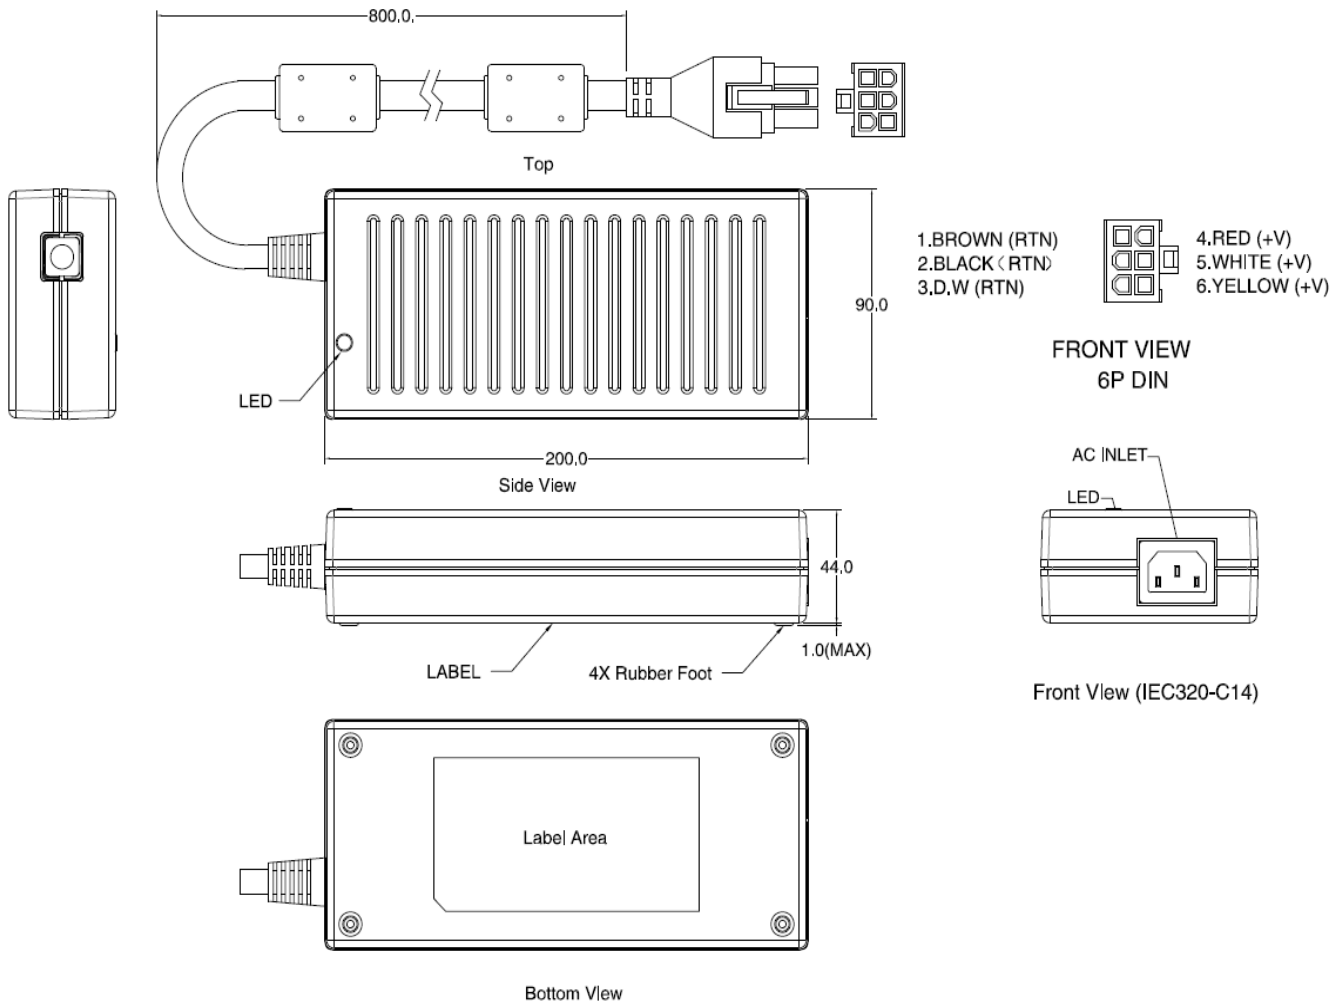

Dimension : L200(7.874") x W90(3.543") x H45(1.77")mm

NOTE : TOLERANCE: +/-1mm(0.04")(LxWxH)



**POWER-WIN TECHNOLOGY CORP.**

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Road, Shi-Chi, New Taipei City, 22101 Taiwan, R.O.C.

Tel : 886-2-26983989(Rep) Fax : 886-2-26983978

http : //www.power-win.com

E-Mail : sales@power-win.com

REV. 1.1

**MATCHING CONNECTORS**

**DC Output Connector**


Standard male plug(power supply side): 6 PIN Mini Fit Pitch:4.2mm

Mating Connector : Molex P/N: 39-28-1063 or equivalent.


DC output cable: 5C+1, UL2464, 16AWG, VW-1, 80°C, 300V

- |                    |   |               |
|--------------------|---|---------------|
| 1.BLUE (RTN)       |  | 4.RED (+V)    |
| 2.BLACK (RTN)      |   | 5.WHITE (+V)  |
| 3.Drain Wire (RTN) |   | 6.YELLOW (+V) |

6P HOUSING  
FRONT VIEW

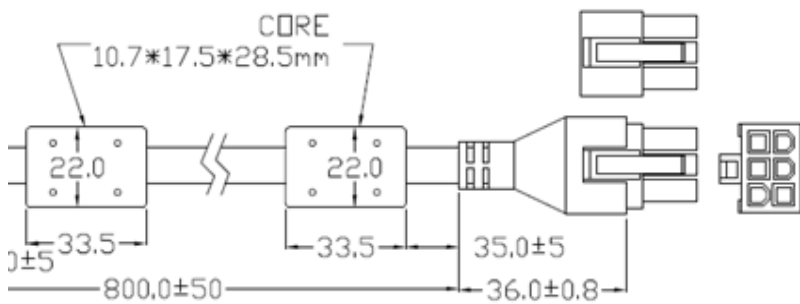

**Derating Curve**

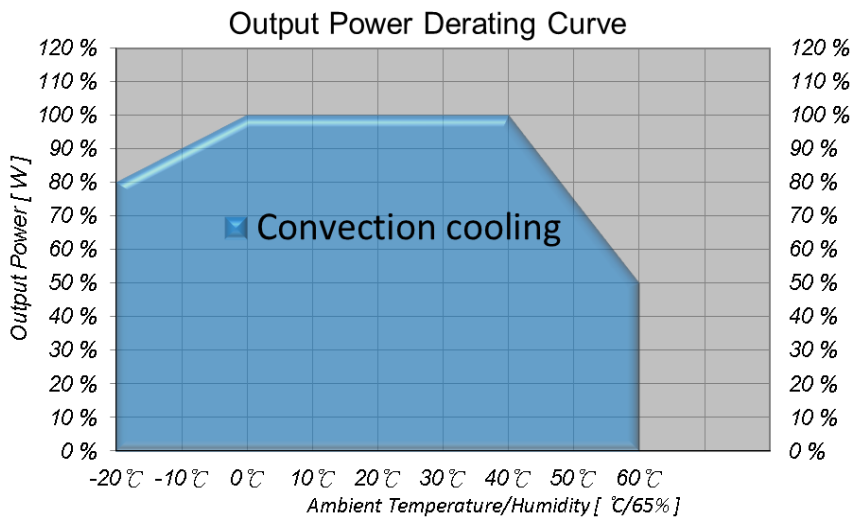

POWER-WIN TECHNOLOGY CORP.

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Road, Shi-Chi, New Taipei City, 22101 Taiwan, R.O.C.

Tel : 886-2-26983989(Rep) Fax : 886-2-26983978

http : //www.power-win.com

E-Mail : sales@power-win.com